





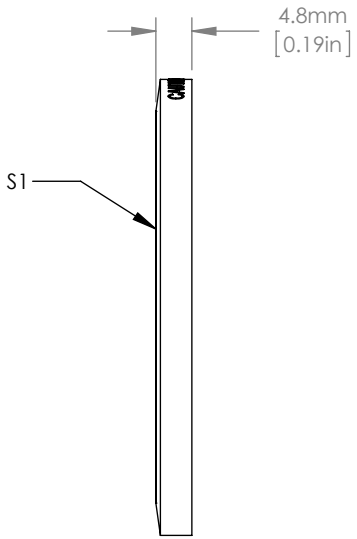

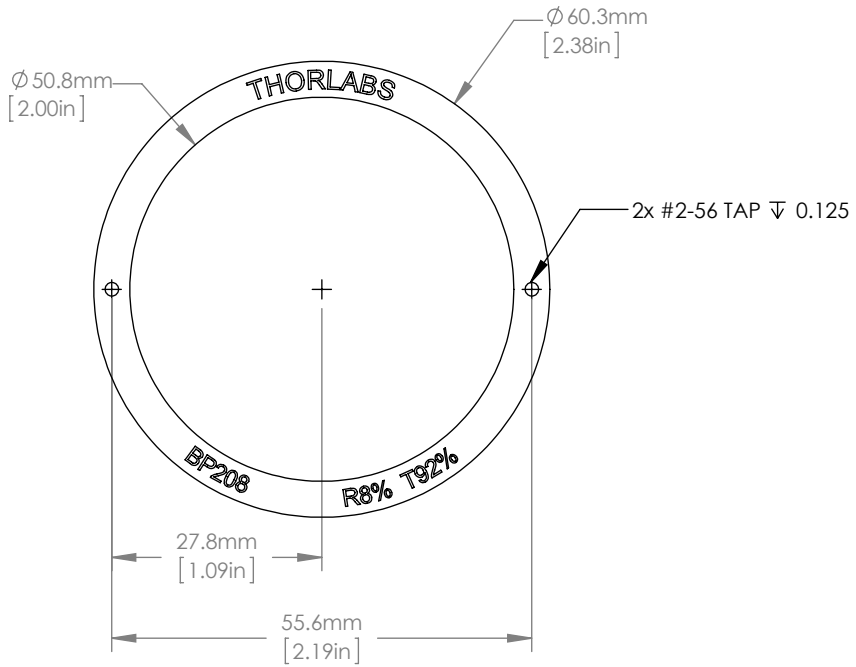

NOTES/SPECIFICATIONS:

1. FRAME: ENGRAVED BLACK ANODIZED ALUMINUM
2. MEMBRANE (S1): NITROCELLULOSE
3. MEMBRANE THICKNESS: 2µm
4. SPLIT RATIO (AVG): R=8% T=92%
5. WAVELENGTH RANGE: 400-2400nm
6. AOI: 45°
7. SURFACE QUALITY: 40-20 SCRATCH-DIG
8. INDEX OF REFRACTION 1.5 AT 550nm
9. TRANSMITTED WAVEFRONT: λ/2 AT 633nm
10. REFLECTED WAVEFRONT: <λ AT 633nm

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	EMT	09/AUG/12
APPROVAL	WD	02/MAY/13

COPYRIGHT © 2013 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

50.8mm CLEAR APERTURE
PELLICLE BEAMSPLITTER R8% T92%

MATERIAL	REV
SEE NOTES	D

ITEM #	APPROX WEIGHT
BP208	3.72 g